




<b>Brand</b>	V-TAI
<b>Description</b>	Pots, Pans Utensil Washers (Compact Style)
<b>Model</b>	VT-CE-UWM
<b>Origin</b>	China

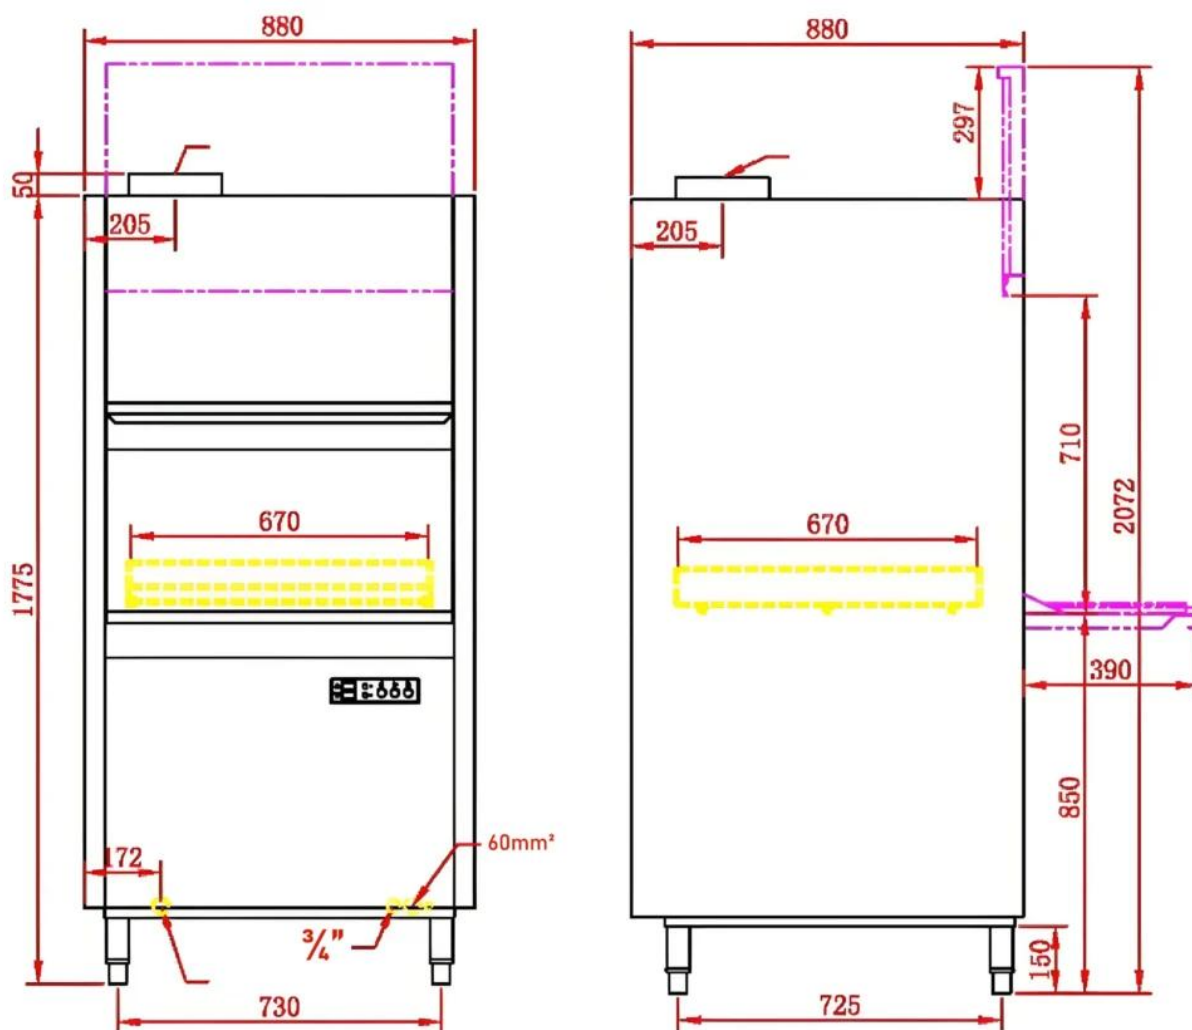

(The Picture of the machine is for reference only)

**Applicable venues:** cake shops, bakery shops, western restaurants, etc.

**Product function:** cleaning pots, crown molds, Hokkaido molds, mixing tanks, baking trays, small toast boxes, mixing basins, turnover boxes and other containers.

**Parameters:**

- Machine dimension: 880\*880\*1775mm
- Loading Dimension: 670\*670\*660mm
- Max Washing Height: 660mm
- Tank Capacity: 45L
- Booster Tank Capacity: 16L
- Water consumption: 2.5L/racks
- Wash pump power: 2.0kW
- Wash Tank Heater: 6kW
- Booster Heater: 9kW
- Rinse Pump Power: 0.37kW
- Capacity: 20~30rack/hr
- Power Supply: 380V/3N 50HZ
- Electrical Loading: 17.2kW
- Cable: 10mm<sup>2</sup>
- Water Pressure:  $\geq 0.5\text{kg/cm}^2$
- Exhaust Pipe:  $\Phi 175\text{mm}$
- Inlet: 3/4"
- Outlet: 1½"

**Pots, Pans and Container Utensil dishwasher**

This warewashing system incorporates several key features designed for optimal performance, durability, and ease of use.

- **Robust Pump System:** The system is equipped with an international brand motor powering a 3.0kW pump motor system. This configuration features a pump body and impeller constructed from durable SUS 304 stainless steel, ensuring reliable and long-lasting operation. The motor boasts an IP55 protection rating against dust and water ingress.
- **Advanced Control and Protection:** A CPU-integrated distribution-type fuse protection system is implemented for enhanced electrical safety. This design simplifies maintenance and facilitates efficient troubleshooting.
- **Durable and Hygienic Construction with Efficient Drying:** The entire machine series is constructed from robust and durable SUS 304 stainless steel, ensuring compliance with stringent hygiene standards. A high-efficiency exhaust ventilation design is incorporated to promote faster and more effective drying of washed items.

- **Unique Surround Wash System:** The machine features a unique surround-type high-temperature washing and cleaning pulley frame design. The washing temperature is thermostatically controlled between 68°C and 70°C, while the rinse temperature can reach up to 85°C for effective sanitization.
- **Convenient Dual-Action Door:** The machine is designed with a door that opens upwards and downwards simultaneously. The lower section of the door functions as a convenient working platform, facilitating easy loading and unloading of items.



**[Copyright and Confidentiality Notice]**

All intellectual property rights pertaining to this document and its accompanying materials are protected by law. Reproduction or use in any form is strictly prohibited without the express authorization of the rights holder.

This document may contain trade secrets, proprietary information, and legally protected content, and is intended for lawful use only by the designated recipient.